


Damper and Fan Assembly Instructions

#W249X16091
Pg 1/1

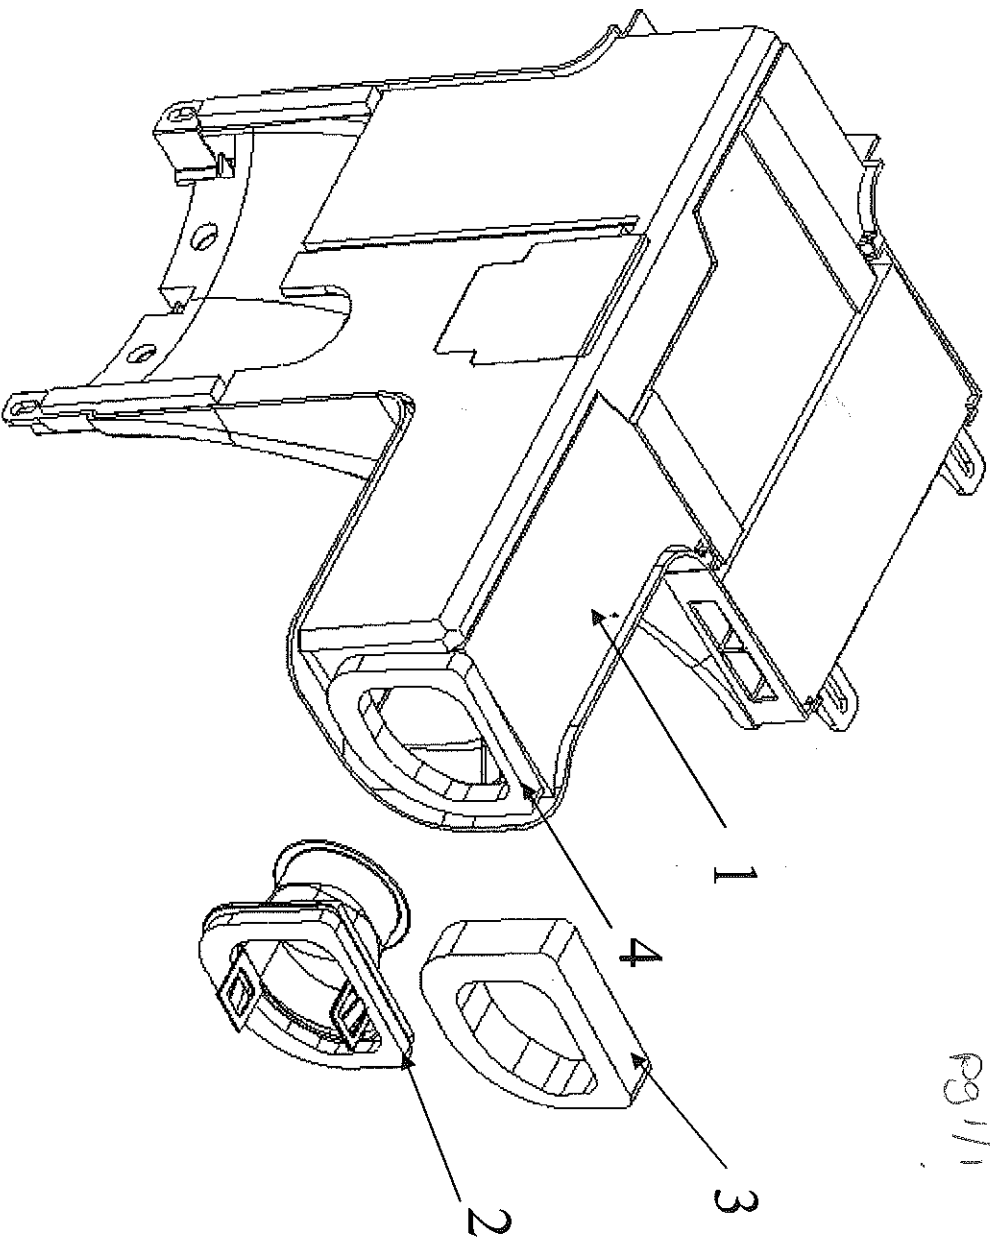

1. Remove old damper and fan assembly(same as Item 1) from refrigerator, saving screws for later use.
2. If nozzle(same as item 2) is attached to liner continue. If there is no nozzle present after removing damper and fan assembly proceed to **Alternate Assembly**.
3. If nozzle(same as item 2) is attached to liner and in good condition(seals not torn or damaged), assemble item 1(damper and fan assembly) using screws from step 1. Discard Items 2 and 3.
4. If Item 2(nozzle) is damaged, remove from liner by firmly twisting in a counterclockwise motion and pulling away from FF liner. Insert new Item 2 nozzle by snapping into liner making sure shape of liner hole and nozzle match. Assemble item 1(damper and fan assembly) using screws from step 1. Discard Item 3.

Alternate Assembly

1. Remove Item 4 (3/8" gasket) from Item 1(damper and fan assembly). Replace Item 4 with Item 3(3/4" gasket) making sure gasket aligns with hole shape. Assemble item 1(damper and fan assembly) using screws from step 1. Discard Items 2 and 4.