


MODEL XB90C VENTILATION FAN



FEATURES

UltraGreen™ Energy Saving DC Motor

- DC motor for efficiency well beyond ENERGY STAR® requirements.
- LEED and Energy Star for Homes compliant.

UltraSilent™ Sound Technology

- HVI certified, best-achievable <0.3 Sone level provides nearly silent operation for a relaxing environment.
- State-of-the-art blower and duct outlet design smooths airflow.
- High tech DC motor designed for nearly silent operation.

UltraSmart™ Control Technology

- Powerful operation maintained over a wide range of real-world installations (CFM ratings maintained through at least 0.25" static pressure).


UltraQuick™ Installation Technology

- Unique telescoping mounting frame fits through retrofit drywall opening to allow easy installation from the room side. No attic access needed!
- Captive screws allow for easy new construction installation.
- Mounting frame positioning tabs provide easy vertical positioning for new construction.
- Easy to insert and remove snap-in housing. No screws required!
- Easy to insert and remove snap-in blower.
- Inside or outside duct connector and knockout plate mounting provides flexibility for new construction or retrofit.

cUL Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit (ceiling mount only).

3-year warranty.

DIMENSIONS

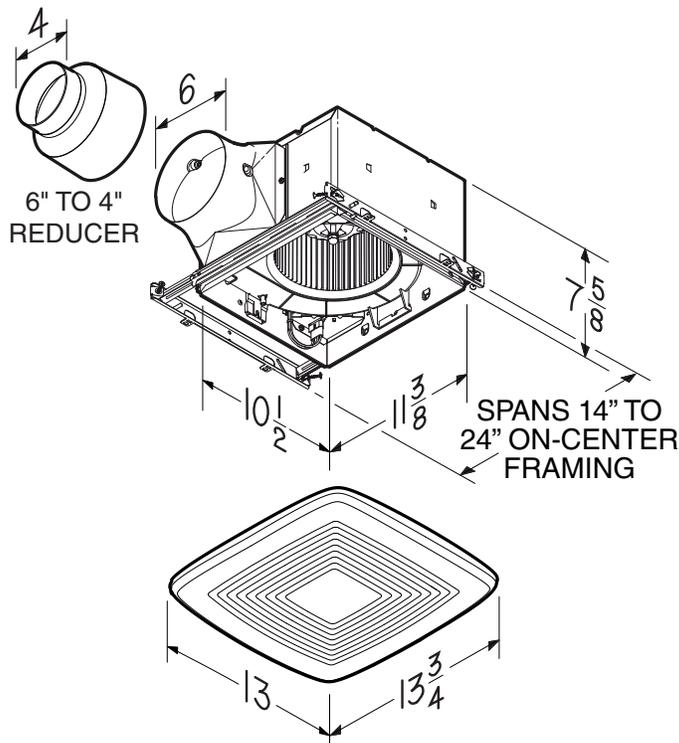

NOTE: Dimensions shown are in inches.



Broan-NuTone Canada; Mississauga, Ontario www.broan.ca 877-896-1119

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by Date |

BROAN® PERFORMANCE SPECIFICATIONS

MODEL XB90C VENTILATION FAN

ELECTRICAL & WEIGHT

| Volts | Hz | Amps | Shipping Weight (lb.) |
|-------|----|------|-----------------------|
| 120 | 60 | 0.1 | 12.5 |

HVI PERFORMANCE


| 6" Duct | | | | 4" Duct | | | | | |
|---|---------------|---------------|---------------------|---------------|---|---------------|---------------|---------------------|---------------|
| 0.1 Ps - Static Pressure (in. H ₂ O) | | | | 0.25 Ps | 0.1 Ps - Static Pressure (in. H ₂ O) | | | | 0.25 Ps |
| Airflow (CFM) | Sound (Sones) | Power (Watts) | Efficacy (CFM/Watt) | Airflow (CFM) | Airflow (CFM) | Sound (Sones) | Power (Watts) | Efficacy (CFM/Watt) | Airflow (CFM) |
| 90 | < 0.3 | 6.6 | 13.6 | 90 | 90 | 0.5 | 9.5 | 9.4 | 89 |



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

FAN CAPABILITY

XB90C - 6" DUCT

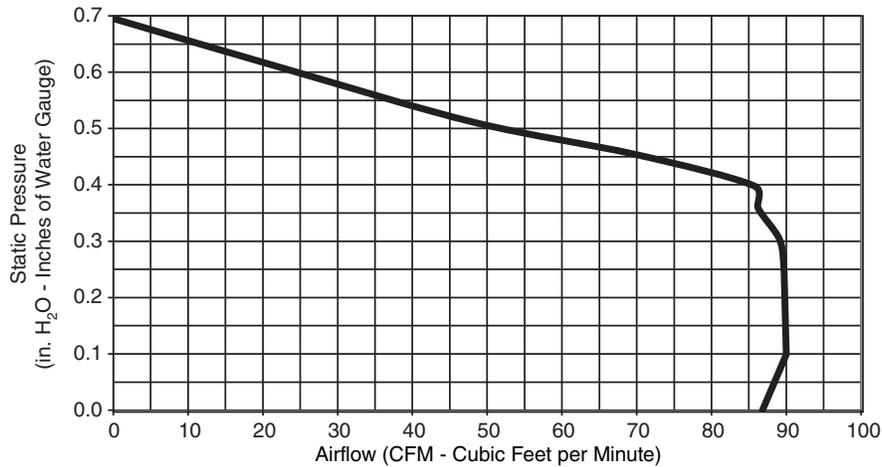

XB90C - 4" DUCT

